



**Narrow Batten Clip System:**

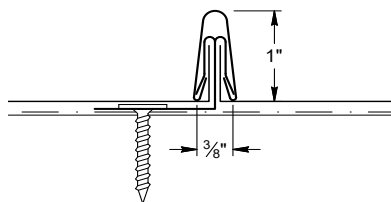

**Wide Batten Clip System:**




**T-PANEL KEY FEATURES**

- T-Panel™: 24 & 22 gauge Tru-Gauge™, .032 Aluminum, 16 & 20 oz. copper
- Vertical interlocking applications: allows installation from both directions starting at any location
- Tapered panels available to 20'-10"

- Standard panel lengths 2' to 60'
- 3:12 minimum pitch recommended
- Concealed fasteners: fasteners cannot leak
- Panel options: Striations, Accent Ribs, and Flat Pan

**NARROW BATTEN KEY FEATURES**

- T-Panel™ standard nominal width: 12", 16", and 20" (Please inquire for other coverage options)
- Narrow Batten: fabricated in 24 gauge steel, .032" aluminum and 16 & 20 oz. copper
- Narrow Batten: 1" vertical rib
- Factory and field radius of roof panels and Narrow Battens down to 4' radius
- Full length Narrow Battens are roll formed to 25'. (Over 25' inquire)
- Narrow Batten incorporates nicely with 1" Snap Lock panels like Easy-Lock™, Streamline™, or Premier-Lock™ standing seam panel
-  UL 790 Class A Fire rated & UL 2218 Class 4 Impact (hail) rated, UL580 Class 90 Wind Uplift rated for use with Narrow Batten
- UL Construction No. 344, 397 & 397A for use with Narrow Batten
- ASTM E1646/E331 Water Penetration and E1680/E283 Air Leakage Testing
- ASTM E1592 (Coming 2024)

**WIDE BATTEN KEY FEATURES**

- T-Panel™ standard nominal width: 14" and 18" (Please inquire for other coverage options)
- Wide Batten: fabricated in 24 gauge steel, .032" aluminum and 16 & 20 oz. copper
- Wide Batten: 1-7/8" vertical rib
- Curving not available on Wide Batten profile
- Full length Wide Battens are roll formed to 25'. (Over 25' inquire)
- Wide Batten incorporates nicely over Versa-Span™ standing seam panel (separate clip required)
- UL 790 Class A Fire rated & UL 2218 Class 4 Impact (hail) rated, UL580 Class 90 Wind Uplift rated for use with Wide Batten
- UL Construction No. 344, 397 & 397A for use with Wide Batten
- ASTM E1592 (With Versa Span and Sanp on Spider Clip)

**WEIGHT CHART**

T-Panel	TYPE	24 GA STEEL	.032" ALUM
THICKNESS		0.0236"	0.032"
WEIGHT/LINFT	12"	1.284 LBS	0.608 LBS
WEIGHT/SQFT	12"	1.264 LBS	0.599 LBS
WEIGHT/LINFT	16"	1.605 LBS	0.760 LBS
WEIGHT/SQFT	16"	1.194 LBS	0.564 LBS
WEIGHT/LINFT	20"	1.926 LBS	0.912 LBS
WEIGHT/SQFT	20"	1.145 LBS	0.542 LBS