

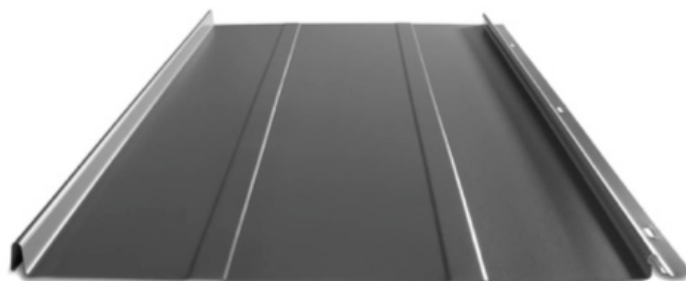


**STRIATIONS**



**ACCENT RIBS** 2 or 3 Ribs available


### SEAM DETAIL

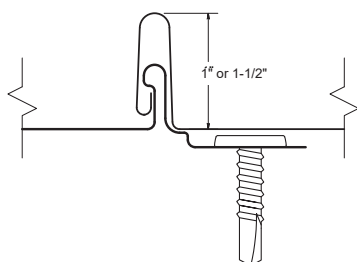

### KEY FEATURES

- Standard width for Premier-Lock 100 is 15-3/4"  
Standard width for Premier-Lock 150 is 14-3/4"
- 24 and 22 Tru-Gauge™ and .032" and .040" Aluminum
- Factory-notched panels available
- Anti-Capillary dry lock seam
- Pre-slotted fasteners flange: allows expansion / contraction of panel
- Premier-Lock 100 - 1" rib height
- Premier-Lock 150 - 1-1/2" rib height
- Concealed fastener system
- 3:12 minimum pitch recommended  
*(For lower pitches please inquire)*
- Standard panel lengths 2' to 35'  
*(For longer panels, please inquire)*
- Panel options: Striations, Accent Ribs, and Flat Pan
- Manufactured in Sacramento CA & Riverside CA

### TESTING

-  Code compliance UL Evaluation Report  
UL ER #25913-01
  - UL Construction No. 589
  - UL 580 Class 90 - Wind Uplift
  - UL 790 Class A (ASTM E108) - Fire rated
  - UL 2218 Class 4 - Impact (hail) rated
  - ASTM A653/A924 - G90 Galvanized
  - ASTM A792 - Zincalume/Galvalume AZ-50/55
  - ASTM B209 - Aluminum Substrate
- (Premier-Lock™ 100 carries its UL Classification under the Easy-Lock™ profile designation)




The Premier-Lock™ Standing Seam has the anti-capillary dry lock seam. It's designed with softer, less industrial lines to provide a more architecturally pleasing appearance.

## MATERIAL SPECIFICATIONS

- 24 Tru-Gauge™ Kynar 500® Painted Steel
- ▲ 22 Tru-Gauge™ Kynar 500® Painted Steel
- ✦ .032" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 and 22 Tru-Gauge™ bare Zinalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- .040" Kynar 500® Painted Aluminum (please inquire)
- 24 Tru-Gauge™ Bonderized
- 22 gauge Rusteel Plus™ (A606)
- 16 OZ & 20 OZ Real Copper
- Kynar 500® and substrate testing data available (See website)


## FINISHES

- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Colors
- Kynar 500® Paint System - the ultimate in exterior durability and color retention
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications
- “Oil Canning” is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection

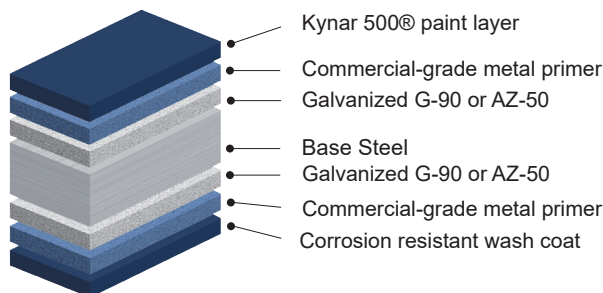


## STANDARD COOL KYNAR 500® COLORS


▲ 22 Tru-Gauge™  
✦ .032 Aluminum

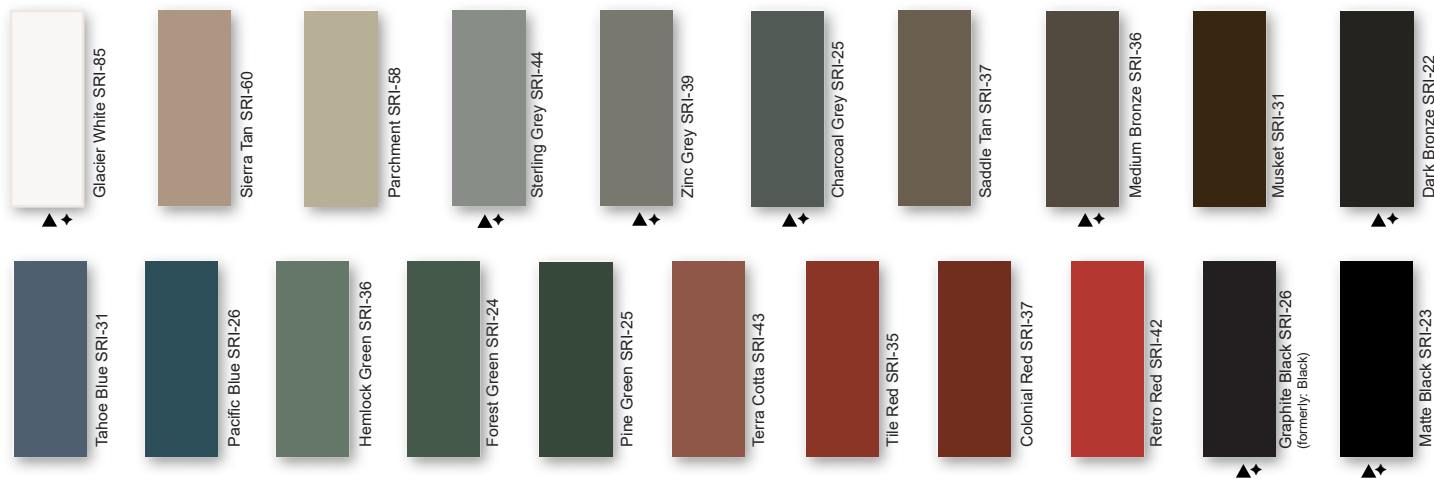

## PREMIUM METALLIC COOL KYNAR® COLORS

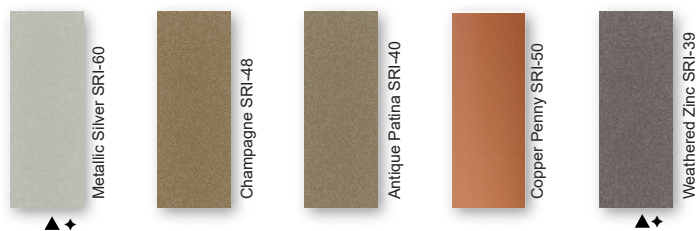

## SPECIALIZED MATERIAL

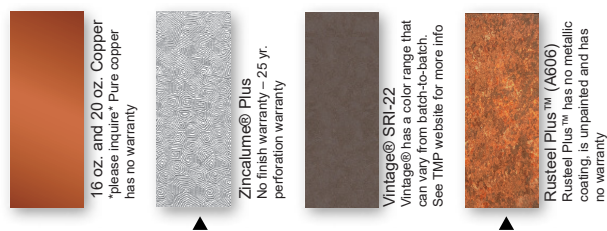

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.\*\*\*Oil canning is not a cause for material rejection\*\*\*

